

Mk III DIGITAL GREASE METER



For accurate delivery of grease according to manufacturer's recommendations.

Longer bearing life, save over 30% grease usage.

APPLICATIONS

- In line design for installation into almost any automatic system for dispensing lubricant or monitoring grease flow.

FEATURES

- Large, easy to read display with programmable universal units: cm³, grams, oz or fl oz.
- Resettable LCD counter
- Advanced oval gear technology electronic meter.


Mk III DIGITAL GREASE METER

SPECIFICATIONS

| MODEL Mk III | PART # 0102525-2 |
|-------------------------|--|
| HOUSING MATERIAL | Aluminum, anodized |
| Seal material | Neoprene rubber |
| Maximum Flow | 1,000 cm ³ / min |
| Measuring Accuracy | ± 3% up to 30 MPa (4,400 psi) |
| Working Pressure | Max 70 MPa (10,000 psi) |
| Number of digits/height | 4 digits, 9 mm display |
| Grease medium | Grease up to NLGI 2 |
| Battery | 1 piece AA (1.5 V) |
| Connections | 1/8 - 27 NPTF female |
| Weight | 0.3 kg (.7 lb) |
| Optional accessories | Pair with grease meter gun, quick couplings, swivel fittings |

ASSALUB GREASE HANDLING - Mk III GREASE METER

| DESCRIPTION | PART NUMBER |
|---|------------------|
| Mk III Grease meter | 0102525-2 |
| Ext. hose; 1/8" NPT male; 800 mm length | 0904902 |
| Ext. hose; 1/8" NPT male; 500 mm length | 0904984 |
| Grease meter with gun | 0102410-2 |
| Air gun | 902947 |
| Quick coupling (1/8" NPT female) | 906408 |
| Quick coupling (1/8" NPT male) | 906409 |
| Grease Control Valve | 0043750-3 |
| Z-swivel | 0053515 |
| L-swivel | 0053520 |

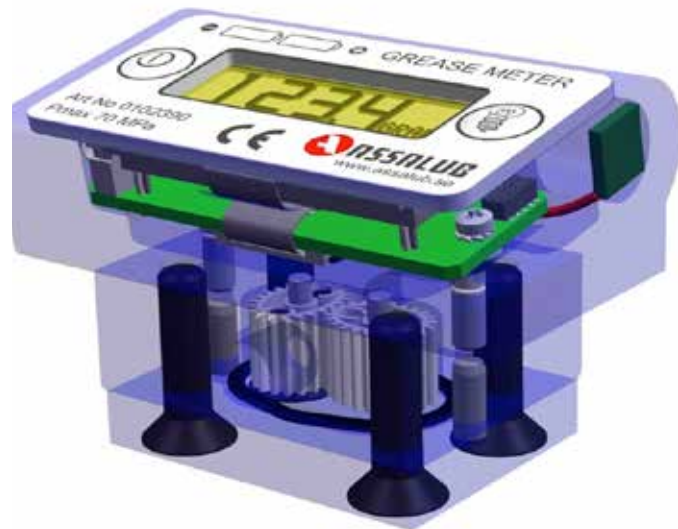

GREASE METER GUN



GREASE FILTER



QUICK CONNECTORS



SWIVEL FITTING